


Refrigerator Lock Installation Guide

- ① The Refrigerator Lock consists of two pieces - the base plate and the cover plate. The cover plate should be locked to the base plate during installation.

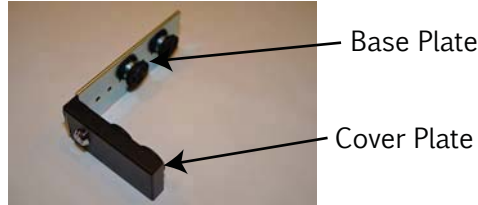

- ② Place the Refrigerator Lock in various locations to determine the best fit on the refrigerator.* Ensure base plate flex feet do not extend past refrigerator body onto refrigerator door. The flex feet located on the inside of the cover plate may need to be adjusted to ensure they are in full contact with the refrigerator door. Adjustments can be made by loosening the standoff(s) from the cover plate and/or the flex feet from the standoffs.**

**An additional standoff is included with each lock and can be used in conjunction with the standoffs that are already installed inside the cover plate if additional adjustments are necessary. The standoff may also be used on the base plate flex feet.




*Lock can be installed on top or side of a refrigerator. Lock should be installed on side furthest from the hinges. (installation location will vary depending on make and model of refrigerator)

- ③ Once a suitable location has been determined use a pencil and lightly trace the outline of the cover plate and base plate on the refrigerator. Using the provided alcohol wipes, thoroughly clean the surface of the refrigerator as well as the flex feet. Make sure all bonding surfaces are completely clean and allow to air dry in order to achieve the best possible bond.



- ④ Put the Refrigerator Lock in the “locked” position. Using the provided glue, place 7-8 drops on each of the flex feet. Make sure to place drops of glue evenly around each foot. Carefully place the lock in the marked area and apply firm pressure for 3-4 minutes. It is very important to apply steady pressure for 3-4 minutes and that no air enters between the flex feet and refrigerator during this time.

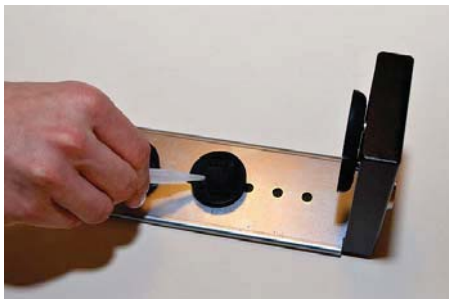

Combination#
(combination model only)



Refrigerator Lock Installation Guide

- ⑤ After the initial 3-4 minute hold time allow the lock to sit untouched for 12 hours. Do not open the refrigerator for 12 hours. The lock will be fully cured after 24 hours.



Contact Information

Customer Service - (866) 232-4233

Technical Support - sales@lucasdist.com

Website - www.lucasdist.com

If calling from outside the U.S. please dial 770-554-3560